



ALABAMA
PORT AUTHORITY
PORT OF MOBILE

Second Addendum

Project Name **Main Gate Realignment**

Location **Mobile, AL**

Project # **11447 Task 2** **November 2025**

Second Addendum

Main Gate Realignment

December 4, 2025



Project Name **Main Gate Realignment**


Location **Mobile, AL**

Project # **11447 Task 2**

November 2025

The following is provided in response to bidder inquiries:

1. Existing Guard Shacks are to be removed by contractor and placed as directed by owner then retained by owner.
2. Existing light pole to be relocated 10' west of its current location as shown on sheet C200. Provide new cast in place concrete foundation:

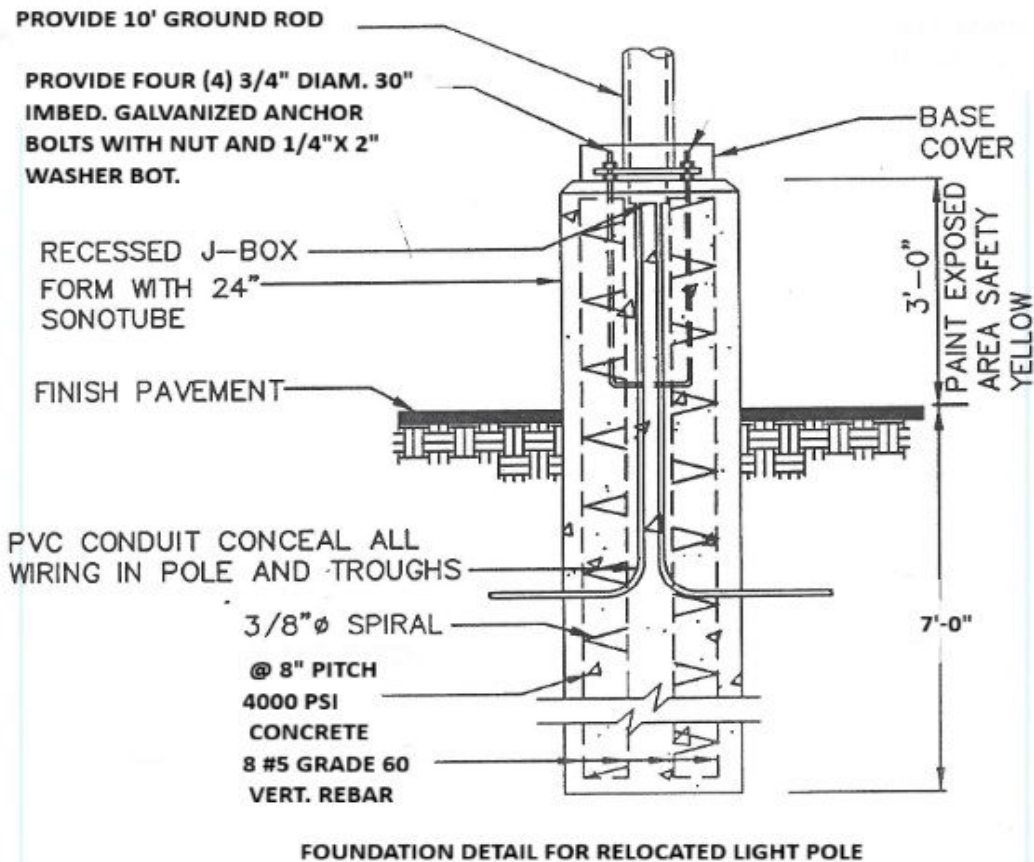

3. 1" PVC in schedule of prices includes comms and electrical conduit in new islands.
4. Combined, Guard houses will require 16 galvanized 5/8" diam. x 8" imbed. anchor bolts set with Hilti HIT-RE 500 V3 or owner approved equal.
5. Electrical/Comms junction box depicted on sheet C202 at the north end of the entrance guard house is not included in this scope of work.